

PREMIER PROTECTIVE COATINGS

CATALOG



 $\bullet \bullet \bullet \bullet \bullet$

ABOUT US

Always step forward and make a difference for better services

We are dedicated problem solvers, innovators, and partners in progress. With deep roots in Texas, our company embodies the spirit of resilience, hard work, and innovation. We leverage cutting-edge technology and sustainable practices to develop coatings that meet and exceed industry standards. Our team comprises passionate individuals driven by a shared vision of excellence and a commitment to customer satisfaction. Whether it's protecting infrastructure, enhancing aesthetics, or improving functionality, we are here to provide tailored solutions that meet the unique needs of our clients while contributing to a brighter, more sustainable future.



OUR SERVICE


We provide a one-stop service for you. Reducing difficulty and saving your time is our goal.

Industrial Coatings

We handle industrial coatings for residential and commercial applications

Private Label


We offer product labeling under your own brand.

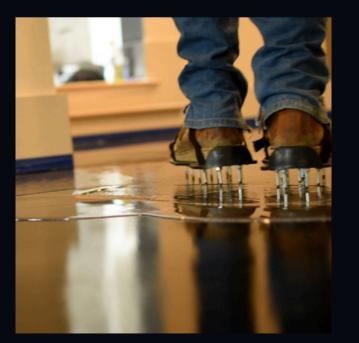



Support

Experience in providing product advice across various projects

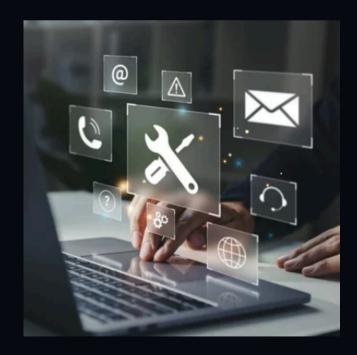

OUR COATINGS

• • • • • • • • • • • • • • • • • •



EPOXY 100

WHITE - BLACK - TAN -LIGHT GRAY -MEDIUM GRAY - DARK GREY

Is a solvent-free, no VOCs, virtually odorless two-component epoxy coating system with medium viscosity, which results in excellent resistance to UV rays, with one of the industry's slowest tendencies to yellow over time



SOLVENT-BASED EPOXY 100% SOLIDS

PART A | MX RATIO 2A:18

WHITE



residuate group flooring colding. (por) 100 to finance of the standar way floation benddan when filling was and on construction to 20 VOC & VORM Free, colorines, 100 volds, with a 6 month was filling to the standard standard of the construction of the bendla waters FPC EPOV 100 designed to be cost effection and the bendla waters insiderance. Froduct is instauged and a provide water (filling maintenance. Froduct is instauged and and one conciliance was standard and do not conciliance in NARDOVA.

PRODUCT APPLICATION

Min Ratio (2.1) FPC (Equit) 100 minute were approximated (exp (3) has resting an (A) to Nardenero (1). For Life. Here properly minut (exp (3) has resting an any vary depending on temperature. 10/05 Solds. PPC (Exps) 100 will care to 2 does (every making were interfered and proof Prognettis. Bold where it cours are brought to you by the last of proof Promotils. Bold where it cours are brought to you by the last of proof Promotils. Bold where it cours are brought to you by the last of proof Promotils.

MEX RATIO Read product Labels and application instructions prior to on. Its (pre) for Read product Labels and 29 (18) by volume.

HEALTH AND SAFETY Read the Safety Data Sheet (505) and container labels in estimation safety information. This product is intensided for induction are it provided.

PPC



POLYASPARTIC 85

CLEAR

Polyaspartic 85 stands as a versatile twocomponent solution, featuring a balanced 1:1 ratio. This product serves the dual purpose of being a colored basecoat and a crystal-clear topcoat. It excels in rapid turnaround and swift curing under standard conditions, typically becoming tack-free in approximately 120 minutes.



PRODUCT DESCRIPTION Polyaspartic 85 is an edi 2-component polyanta. E el

Creatives an event top cating principles we tinted. It extains a high detect wet ward over fivenes have a determination ing polymers, composite, bio with bonding performance. The tanging it ing industries such as powe path as industrial endoor hear periods as industrial industrial industrials.

MIX RAT

Read product labels and average Polyaspartic 85, preak. Ren JS-re pigment is properly depende Average 85 Hardeerer (8 Sde) at a rote d (1-2) hand in small quantity. For 15 plane it a variable speed drill chicog 1/6, for a variable speed drill chicog 1/6, for a variable speed drill chicog 1/6, for

HEALTH AND SAFETY Read the Safety Data Steel SSS zela information. This product is charter of professional applicators only PREMIER PROTECTIVE COATINGS

POLYASPARTIC 85

PART BI MIX RATIO 1A:18

Peddbuch backnernia Pelysagarda KS a mitomi 2 component pojessi banka democrais and unity: 13 all where some top call/points gend per dimer top factors gend per dimer top factors forgending on top if a solid bending performant for the beddetion solid a solid beddetion solid a solid beddetion solid a solid beddetion solid a solid beddetion solid about 500

MEN RATE

Read product lates years Polyangantic 85 pm is land pigment is proper) during the file 85 Kurdener (8.56 z. 100 by hand in statil auto), forse with a scraber good 20 antisiement and attaca autors an

NG ALTIN AND SAFETY Board the Safety Data Sever Scient Information, This point Annual professional application and

MOISTURE VAPOR BARRIER

CLEAR

Is a transparent two-component epoxy, comprising 100% solids with a mild scent and low viscosity. It is specially designed as a moisture barrier coating for treating both new and existing concrete floors exhibiting elevated moisture levels and high ph.





POLYUREA 95

TAN - LIGHT GRAY

Is a two-component, 95 % solids, VOC compliant, polyurea hybrid that was developed as a primer/basecoat for a variety of coating systems. It provides outstanding adhesion on a large number of substrates and performs well in a wide range of temperature conditions.










PPC



POLYUREA BASE COAT 95

CLEAR

TIO 2A:18

.0

00

PPC

CRACK REPAIR

DARK GRAY

Is two parts, high penetration, fast setting, hybrid polyurea for repairing and re-building damaged concrete. The product is a 1:1 ratio, easy to mix system that is 98 % solids and VOC compliant. The PPC CRACK REPAIR FAST can be used to set anchor bolts, repair damaged control joints, fill spalling, and rebuild vertical curbing and steps.





DUCT DESCRIPTION ck Repair fast is a two parts, high perior urea for repairing and re-building damager crack, repair fast can be used to set an trol joints, fill spalling, and rebuild vertical vel can be added to extend the volume of th

K RATIO k each component separately. Pour comparng the proper mixing ratio. Mix together bear in 30 seconds. Only prepare quantity that mat

ALTH AND SAFETY ad the Safety Data Sheet (SDS) and contained a safety information. This product is inten perty trained professional applicators only.

PPi





PART BI MIX RATIO 1A:18

RODUCT DESCRIPTION

Crack Repair fast is a two parts. high per polyurea for repairing and re-building damag-121 ratio, easy to mix system that is 98 The crack repair fast can be used to set a control joints, fill spalling, and rebuild verif gravel can be added to extend the volume of for repairing large spalls, holes, cracks and of

RATIO

Mix each component separately. Pour com using the proper mixing ratio. Mix together b than 30 seconds. Only prepare quantity that

ALTH AND SAFETY

Read the Safety Data Sheet (SDS) and cont and safety Information. This product is in properly trained professional applicators on

KRETE TOPCOAT

LIGHT GRAY - GRAY - CREAM - GREEN -YELLOW - RED

A 4-part polyurethane coating/grout for use with PPC KRETE URETHANE SLURRY SL or PPC KRETE Coving Mortar polyurethane flooring systems.



KRETE URETHANE SLURRY SL

LIGHT GRAY - GRAY - CREAM - GREEN -YELLOW - RED

Is a four components polyurethane self-level system. The standard thickness for PPC KRETE URETHANE SLURRY SL is between 1/8" to 3/16". Attractive smooth matt colored floor finish.



SOLVENTS

ACETONE

This chemical is a solvent that mixes well with water and evaporates quickly, making it well-suited for many household and manufacturing uses.

XYLENE - XYLOL

Can be used in place of Toluene to thin specified oil-based paint, lacquer, varnish, epoxy, adhesives and synthetic enamels when a slower rate of evaporation is desired. Xylene will also remove certain adhesives. Its an excellent clean-up solvent for tools and equipment immediately after use.

UNIVERSAL COLOR PACK

WHITE - BLACK - TAN -LIGHT GRAY -MEDIUM GRAY - DARK GREY

Coloring pigment paste is designed to tint solvent-borne polyvinyl chloride, polyurethane, epoxide, organic-silicon, pentaerythritol modified phtalic resin, nitrocellulose and other system. (request to manufacturer for materials compatibility tables)



SOCIAL MEDIA

Visit our website, Instagram or contact us via email, so we can help you with your requirements

orders@premierprotectivecoatings.com www.premierprotectivecoatings.com <u>/premierprotectivecoatings/</u>







PART B



THANK YOU

FOR YOUR BUSINESS

